

Features

High Efficiency - 88%@5V/3A Full Load

Compact size: 1.27" x 0.65" x 0.4"

8:1&4:1 Ultra-Wide input range

-40°C to +100°C operation without derating

Industrial Standard pin out

Input-to-output isolation 1600Vdc



28ESASxy-x-x-S15-IP

DC/DC PCB Mount Power Supply



Certified to UKCA, CE, RoHS, REACH & EN 62368-1/IEC 62368-1/EN 50155/EN 60601-1 Standards and complies with Efficiency Regulations. These are primarily used in ITE, Audio & Video, Railway, Medical Industries and customised solutions are available upon request.


Model Number Structure

28ESAS	-	024W	050	-	S	-	P	-	S	15
Series Name		Input Voltage (VDC)	Output Voltage (VDC)		Output Quantity		Remote control option		Shape	Watt
Evolving		024W : 9-36	050 : 5		S : single		P : Positive logic		D : DIP	15
Sirius		036W : 9-75	120 : 12				N : Negative logic		MD : Metal Case	
Agate series		048W : 18-75	150 : 15							
Second		110 : 40-160	240 : 24							
			120 : ±12		D : Dual				S : SMD	
			150 : ±15						MS : Metal Case	

Models


Model	Input		Current (A) Full load	Voltage (V)	Output		Efficiency Typ.(%)
	Range	Nominal			Current (A)	Power (W)	
28ESAS024W050-S-□-□15-IP	9-36	24	0.71	5	3	15	88%
28ESAS024W120-S-□-□15-IP	9-36	24	0.71	12	1.25	15	88%
28ESAS024W150-S-□-□15-IP	9-36	24	0.71	15	1	15	88%
28ESAS024W240-S-□-□15-IP	9-36	24	0.71	24	0.625	15	88%
28ESAS024W120-D-□-□215-IP	9-36	24	0.71	±12	±0.63	15	88%
28ESAS024W150-D-□-□15-IP	9-36	24	0.71	±15	±0.5	15	88%
28ESAS048W050-S-□-□15-IP	18-75	48	0.36	5	3	15	88%
28ESAS048W120-S-□-□15-IP	18-75	48	0.36	12	1.25	15	88%
28ESAS048W150-S-□-□15-IP	18-75	48	0.36	15	1	15	88%
28ESAS048W240-S-□-□15-IP	18-75	48	0.36	24	0.625	15	88%
28ESAS048W120-D-□-□15-IP	18-75	48	0.36	±12	±0.63	15	88%
28ESAS048W150-D-□-□15-IP	18-75	48	0.36	±15	±0.5	15	88%
28ESAS110050-S-□-□15-IP	40-160	110	0.15	5	3	15	88%
28ESAS110120-S-□-□15-IP	40-160	110	0.15	12	1.25	15	88%
28ESAS110150-S-□-□15-IP	40-160	110	0.15	15	1	15	88%
28ESAS110240-S-□-□15-IP	40-160	110	0.15	24	0.625	15	88%
28ESAS110120-D-□-□15-IP	40-160	110	0.15	±12	±0.63	15	88%
28ESAS110150-D-□-□15-IP	40-160	110	0.15	±15	±0.5	15	88%
28ESAS036W050-S-□-□10-IP	9-75	36	0.32	5	2	10	87%
28ESAS036W120-S-□-□10-IP	9-75	36	0.32	12	0.83	10	87%
28ESAS036W150-S-□-□10-IP	9-75	36	0.32	15	0.66	10	87%
28ESAS036W240-S-□-□10-IP	9-75	36	0.32	24	0.416	10	87%
28ESAS036W120-D-□-□10-IP	9-75	36	0.32	±12	±0.416	10	87%
28ESAS036W150-D-□-□10-IP	9-75	36	0.32	±15	±0.33	10	87%

Output rated Power VS. Input Voltages

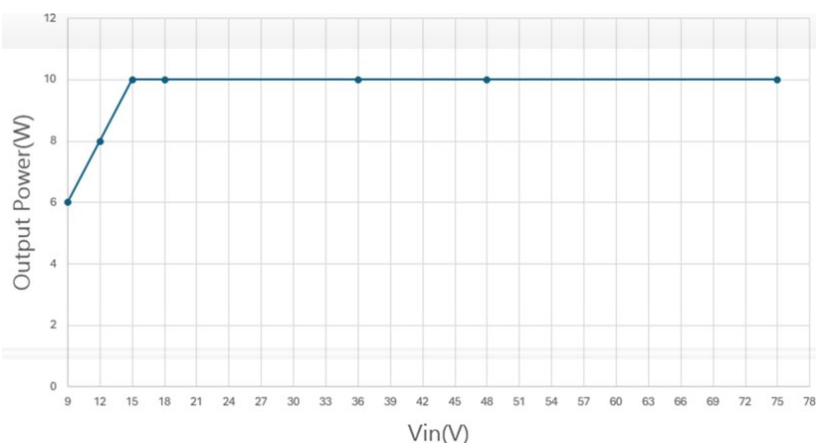


Description

Ideal Power Evolving Sirius - Agate series - Second generation converter is composed of Isolated, board-mountable, fixed switching frequency DC-DC converters that use synchronous rectification to achieve extremely high-power conversion efficiency. These DC-DC converter modules use advanced power processing, control, and packaging technologies to enhance the performance, flexibility, reliability, and cost effectiveness of mature power components. Each module is supplied completely encased to provide protection from the harsh environments seen in many industrial and transportation applications.

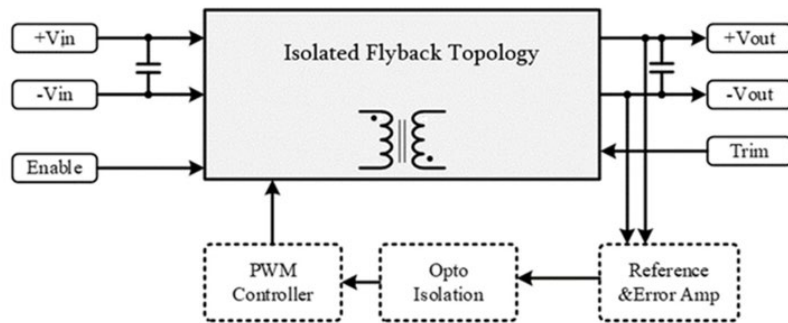

28ESAS Single Series Block Diagram

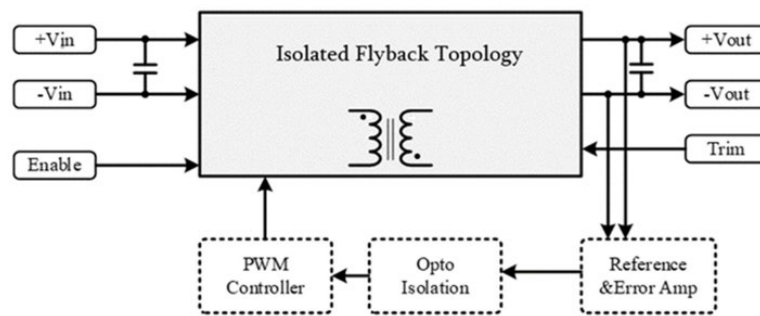

28ESAS Dual Series Block Diagram

Input Data

Parameter	Notes and Conditions	Min.	Typ.	Max.	Unit
Transient Input Voltage Ranges	28 ESAS024W models (100ms max) 28ESAS036W models (100ms max) 28ESAS048W models (100ms max) 28ESAS110 models (100ms max)	--	--	50 50 80 180	VDC
Operating Input Voltage Ranges	28 ESAS024W models 28ESAS036W models 28ESAS048W models 28ESAS110 models	9 9 18 40	24 36 48 110	36 75 75 160	VDC
Under-Voltage Lockout Start up Voltage	28 ESAS024W models 28ESAS036W models 28ESAS048W models 28ESAS110 models	--	8.5 17.5 17.5 38	9 18 18 40	VDC
Under-Voltage Lockout Shutdown Voltage	28 ESAS024W models 28ESAS036W models 28ESAS048W models 28ESAS110 models	7 16 16 35	8 17 17 37	--	VDC
Input filter	All models, Built-in PI Filter				
Enable Function Input	Positive logic ON OFF	Open Short or 0 ~ 1.2			
	Negative logic ON OFF	Short or 0 ~ 1.2 Open			

Output Data

Parameter	Notes and Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	VNOM 50% Load	--	--	±1.5	%
Line Regulation	Low Line to High Line	--	--	±0.3	%
Load Regulation	10% to 100% Load	--	--	±0.5	%
Minimum Load	Single output	0	--	--	%
	Dual output	10	--	--	%
Output Ripple & Noise Voltage	Bandwidth 20MHz and with 1μF MLCC Output Capacitor each output	3.3V & 5V	--	2	%Vpk-pk
		All others	--	1.5	%Vpk-pk
Temperature Coefficient	--	--	--	+0.04	% / °C
Transient Recovery Time	25% load step change	--	800	--	μSec
Transient Peak Deviation	ΔIo/Δt=2.5A/us	--	--	+3	%Vo
Start-Up Time	When use Enable Function	--	20	--	mSec.
Trimming Output Protection	VNOM 10% Load	--	+10	--	%
Output power protection	VNOM 10% Load	--	120	--	%
Over Voltage Protection	VNOM	--	120	--	%

General Specifications & Environmental Data

Parameter	Notes and Conditions	Min.	Typ.	Max.	Unit	
Storage temperature range	All models	-60	--	125	C	
Switching frequency	V _{NOM}	220	--	330	kHz	
Operating case temperature	All models	-45	--	115	m	
Over temperature protection	All models, Auto. Recovery	--	120	--	C	
Thermal impedance	Natural convection (Flat)	5.4 (Vertical) / 7.2 (horizontal)			°C/Watt	
	Natural convection (Groove Cover)	4.6 (Vertical) / 6.5 (horizontal)				
Isolation Voltage (Input to Output)	All models, 1 Minute	2250	--	--	VDC	
Isolation Resistance Input to Output	All models, 500VDC, At 70%RH	100	--	--	MΩ	
Isolation Capacitance Input to Output	All models	--	1500	--	pF	
Humidity (non-condensing)	All models	--	--	95	%	
Calculated MTBF	BellCore-TR-332@ 50°C G.B	--	1.54	--	M HR	
Thermal shock	Environmental Engineering Experimental Tests	MIL-STD-810F				
Vibration		MIL-STD-810F				
Drop		MIL-STD-810F				
Weight	Shape-D (DIP)	Plastic	11.5 (0.41)		g (oz.)	
	Shape-S (SMD)					
	Shape-MD (DIP)	Metal	13(0.46)			
	Shape-MS (SMD)					
Dimensions	1.27" x 0.65" x 0.40" (32.3 x 16.5 x 10.2mm)					
Case Material	Metal + LCP Plastic (Non-Conductive Base)					
Potting material	Silicone					

Standards Compliance

Parameter	Standard	Test conditions	Performance criteria
Environmental Compliance	Reach; RoHS	--	Pass
EMI	EN55032	--	Class A / Class B
ESD	EN61000-4-2	±4 kV Air Discharge ±4 kV Contact Discharge	Crit. A
Radiated Immunity	EN61000-4-3	Level 2, 3 V/m	Crit. A
Fast Transient	EN61000-4-4	±2 kV Applied	Crit. A
Surge	EN61000-4-5	±2 kV Applied	Crit. A
Conducted Immunity	EN61000-4-6	Level 2, 3 V rms	Crit. A

It is recommended to protect the input by fuses or other protection devices.



Modules could meet EN55032 Class A and Class B standard with external components.

The information and specifications contained in this data sheet are believed to be correct at time of publication. All specifications are subject to change without notice. No rights under any patent accompany the sale of any such products or information contained herein.

Conducted EMI



Shape – D (DIP)

Shape – MD (Metal Case DIP)

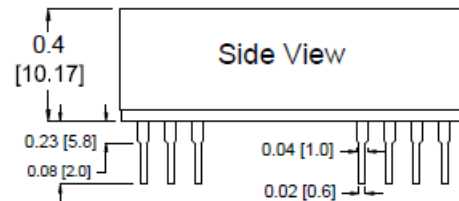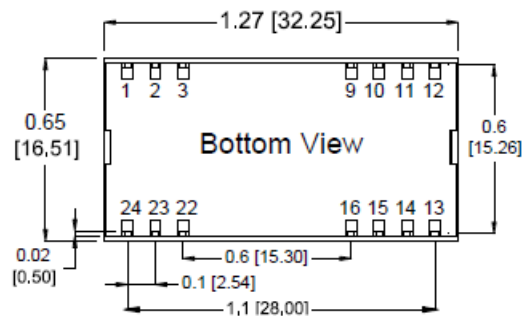

Shape – S (SMD)

Shape – MS (Metal Case SMD)

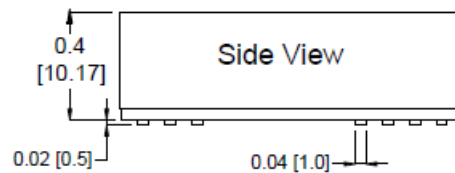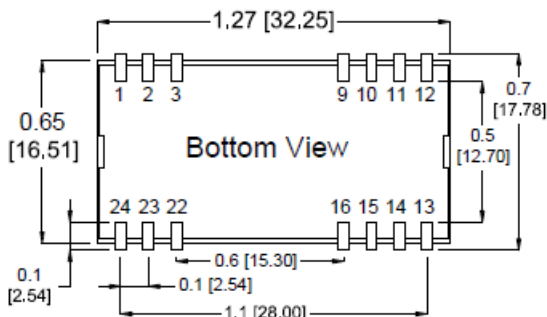

Pin#	Single	Dual
1	EN	EN
2	-Vin	-Vin
3	-Vin	-Vin
9	NC	Comm
10	NC	NC
11	NC	-Vout
12	Trim	NC
13	NC	NC
14	+Vout	+Vout
15	NC	NC
16	-Vout	Comm
22	+Vin	+Vin
23	+Vin	+Vin
24	NC	NC

Note:

Pin Material: Copper Alloy

Pin Plating: Gold

Dimensions in inches [mm]


Tolerances: .XX±0.02 [.X±0.5mm]

Conducted EMI

Input terminal value (typ.) 2 8 ESAS036W120-S-P-D15 @Vin = 48VDC, Iout = 1.25A

The fundamental switching frequency of the module is 260 kHz.

Recommended Circuit Diagram

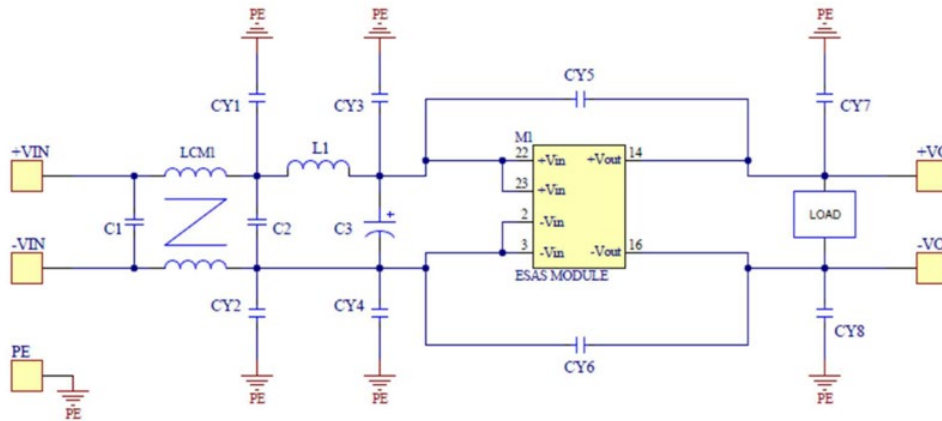


Class A

C1	LCM1	C2	L1	C3	CY1	CY2	CY3	CY4	CY5	CY6	CY7		CY8
10uF	X	X	X	X	X	X	X	X	1000pF	1000pF	X		X
MLC C									Y Cap	Y Cap			


Class B

2.5uF	55uH	4.7uF	90uH	220uF	1500pF	1500pF	x	x	x	x	x	x	x
MLCC		MLCC		EC	Y Cap	Y Cap							

Class A

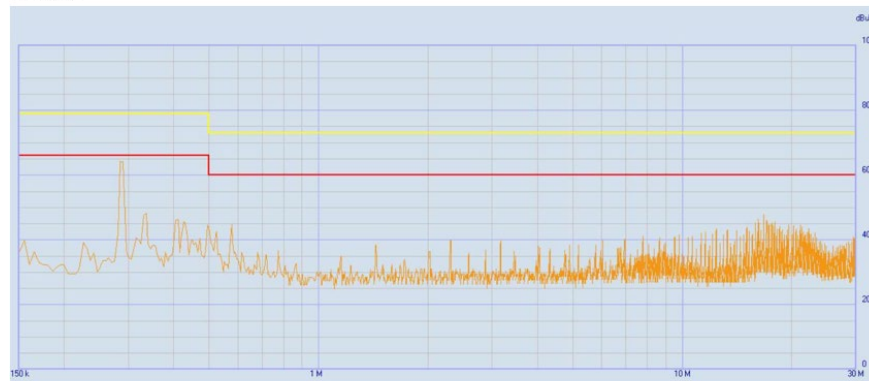

Class B

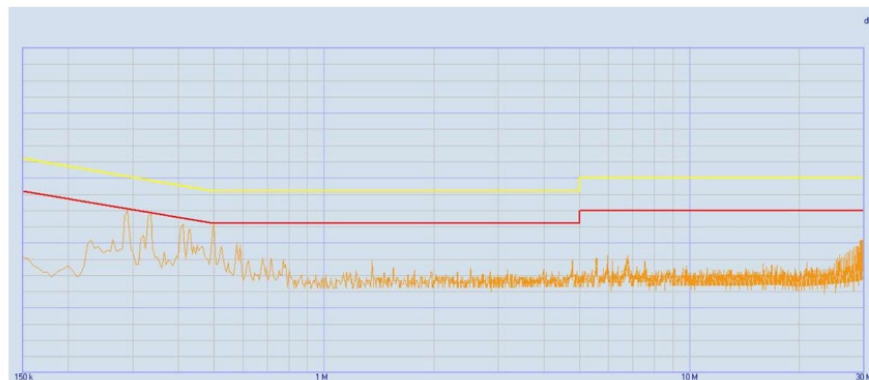

Characteristic curves

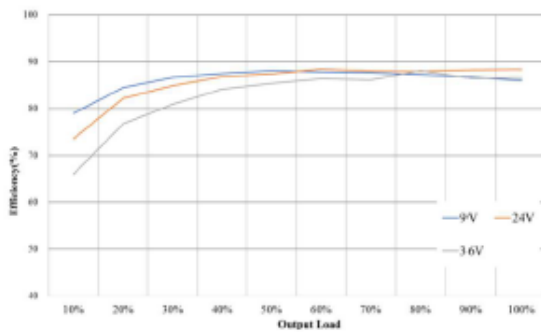


Figure 1 : Efficiency at Minimum, Nominal and Maximum Input voltages VS. Output load.

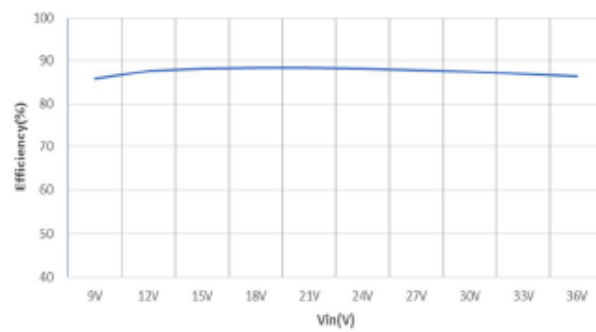


Figure 2 : Efficiency VS. Input Voltages at 100% rated power

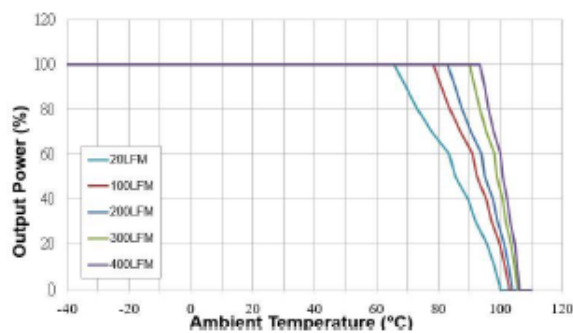


Figure 3 : Ambient Temperature VS. Output Power Derating Curves(Note: 20LFM = Free Air)

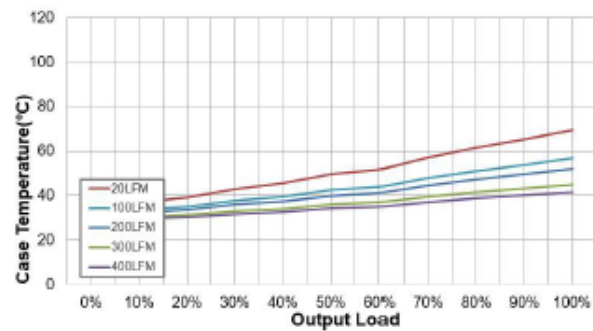


Figure 4 : Case Temperature VS. Output rated Power (Note: 20LFM = Free Air)

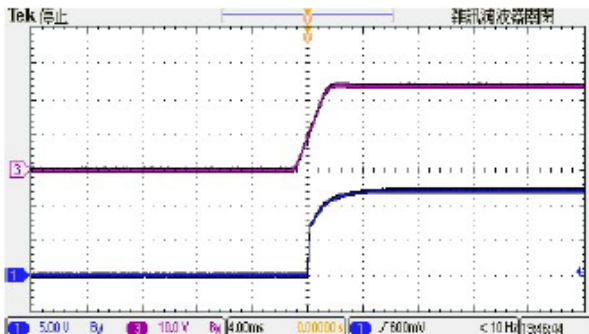


Figure 5 : CH1 = Vout, CH3 = Nominal Input Typical Start-up waveform at Full load.

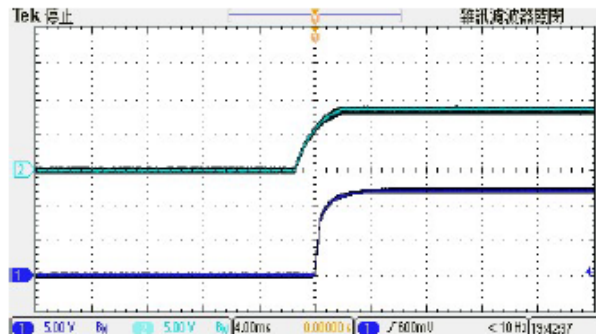


Figure 6 : CH1 = Vout, CH3 = Enable Pin Typical Start-up waveform. Input voltage pre-applied

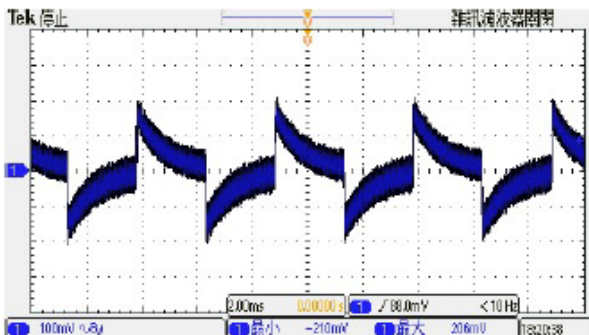


Figure 7 : Transient Response at Output step load (Vin: Typical, 50~75% of output current; $\Delta I_o/\Delta t = 1A/\mu s$)

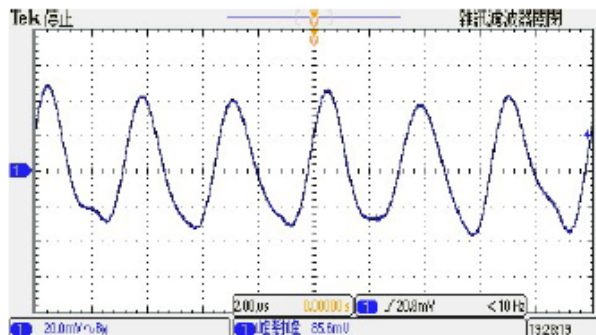


Figure 8 : Output Voltage Ripple & Noise at full load. (Vin: Typical, With Output Capacitor to add 1uF MLCC)

Trimming Output Voltage - For Single Output Models

Only the single output converters have a trim function. That allows users to adjust the output voltage from +10% to -10%, please refer to the trim table that follow for details. Adjustments to the output voltage can be used with a simple fixed resistor as shown in Figures 1 and 2. A single fixed resistor can increase or decrease the output voltage depending on its connection.

Note:

※ Trim adjustments higher than the specified range can have an adverse effect on the converter's performance and are not recommended.

※ If the trim function is not used, leave the trim pin open.

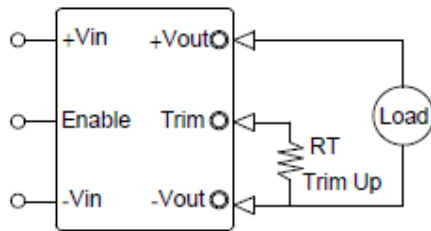


Figure 1. Trim Connections To increase Output Voltages Using Fixed Resistors

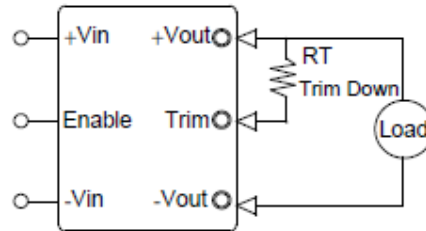


Figure 2. Trim Connections To Decrease Output Voltages Using Fixed Resistors

Trim up resistor value(KΩ)										
Vout	1%	2%	3%	4%	5%	6%	7%	8%	9%	10%
5	113	51	31	20.7	14.6	10.5	7.6	5.4	3.7	2.3
12	274	128	79.5	55.1	40.5	30.7	23.8	18.6	14.5	11.2
15	341	157	95.6	64.9	46.6	34.3	25.5	19.0	13.9	9.8

Enable Control Function

The primary-side, Enable Control function can be specified to operate with either positive or negative polarity. Positive-polarity devices are enabled when the enable pin is left open or is pulled high. See "Enable Function Input. Positive-polarity devices are disabled when the enable pin is pulled low (under +1.0V with respect to -input). Negative-polarity devices are off when the enable pin is high/open and on when the enable pin is pulled low. See Figure 3.

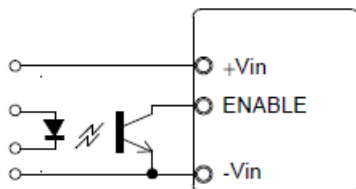


Figure 3. Driving the Enable Control pin

Trim down resistor value(KΩ)										
Vout	-1%	-2%	-3%	-4%	-5%	-6%	-7%	-8%	-9%	-10%
5	117	52	30.5	19.7	13.3	9.0	5.9	5.6	1.8	0.4
12	230	103	61.0	39.9	27.2	18.8	12.8	8.2	4.7	1.9
15	329	147	86.8	56.5	38.4	26.2	17.6	11.1	6.1	2.0

Output Ripple Noise

The two copper strips simulate real-world PCB impedances between the converter and its load. Scope measurements should be made using BNC connectors or the probe ground should be less than 1/2 inch and soldered directly to the fixture. All external capacitors should have appropriate voltage ratings and be located as close to the converter as possible. Temperature variations for all relevant parameters should be taken into consideration. The most effective combination of external I/O capacitors will be a function of line voltage and source impedance, as well as load and layout conditions. See Figure 4

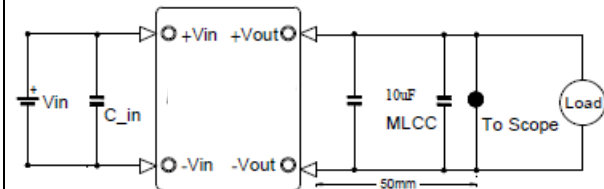


Figure 4. Measuring Output Ripple/Noise(20MHz bandwidth)

Operating Recommendation for UVLO

To ensure module's functionality, we suggest adding an additional capacitor on the input side. This method can be used to avoid possible voltage drop or voltage fluctuation on the input side caused by using a longer or thinner cable.

Recommended Capacitance: 47uF – 100uF

