

## Features

4:1 Wide Input Range

Operating Temperature Range: -45~105°C

Approved to UKCA, CE, RoHS & REACH

Safety Standards to IEC/EN 62368-1 & EN 50155

Efficiency up to 89%

Single output 9~425V DC



## 28SQBSxy-x-x-F100-IP Series

DC/DC PCB Mount Power Supply



Ideal Power's 28SQBSxy-x-x-F100-IP 100W Quarter Brick DC/DC Converters Series are certified to UKCA, CE, RoHS, REACH & EN 62368-1/IEC 62368-1/EN 50155 Standards and comply with Efficiency Regulations. These are primarily used in ITE, Audio & Video, Railway Industries, and customised solutions are available upon request.


### Part Number Structure

| 28SQBS         | - | 110                 | 120                  | - | S          | - | P                     | - | B              | 100  |
|----------------|---|---------------------|----------------------|---|------------|---|-----------------------|---|----------------|------|
| Series Name    |   | Input Voltage (VDC) | Output Voltage (VDC) |   | Pin out    |   | Remote control option |   | Shape          | Watt |
| Supreme series |   | 024W : 9-36         | 050 : 5              |   |            |   | P: Positive logic     |   | B : Base Plate | 50   |
| Quarter Brick  |   | 024 : 18-36         | 120 : 12             |   | S : Dosa V |   | N: Negative logic     |   | F : No Flange  | 100  |
| Second         |   | 048W : 18-75        | 240 : 24             |   | : Vicor    |   |                       |   |                |      |
|                |   | 110 : 40-160        | 280 : 28             |   |            |   |                       |   |                |      |
|                |   | 300 : 180-425       | 480 : 48             |   |            |   |                       |   |                |      |

| Models                    |                      |         |                          |             |             |           |                       |
|---------------------------|----------------------|---------|--------------------------|-------------|-------------|-----------|-----------------------|
| Model                     | Input                |         | Current (A)<br>Full load | Output      |             |           | Efficiency<br>Typ.(%) |
|                           | Voltage (V)<br>Range | Nominal |                          | Voltage (V) | Current (A) | Power (W) |                       |
| 28SQBS024W050-□-□-□50-IP  | 9-36                 | 24      | 2.37                     | 5           | 10          | 50        | 88                    |
| 28SQBS024W120-□-□-□50-IP  | 9-36                 | 24      | 2.34                     | 12          | 4.17        | 50        | 89                    |
| 28SQBS024W240-□-□-□50-IP  | 9-36                 | 24      | 2.34                     | 24          | 2.08        | 50        | 89                    |
| 28SQBS024W280-□-□-□50-IP  | 9-36                 | 24      | 2.34                     | 28          | 1.79        | 50        | 89                    |
| 28SQBS024W480-□-□-□50-IP  | 9-36                 | 24      | 2.34                     | 48          | 1.04        | 50        | 89                    |
| 28SQBS024W050-□-□-□100-IP | 9-36                 | 24      | 2.37                     | 5           | 10          | 50        | 88                    |
| 28SQBS024W120-□-□-□100-IP | 9-36                 | 24      | 4.68                     | 12          | 8.4         | 100       | 89                    |
| 28SQBS024W240-□-□-□100-IP | 9-36                 | 24      | 4.68                     | 24          | 4.17        | 100       | 89                    |
| 28SQBS024W280-□-□-□100-IP | 9-36                 | 24      | 4.68                     | 28          | 3.57        | 100       | 89                    |
| 28SQBS024W480-□-□-□100-IP | 9-36                 | 24      | 4.68                     | 48          | 2.08        | 100       | 89                    |
| 28SQBS048W050-□-□-□50-IP  | 18-75                | 48      | 1.18                     | 5           | 10          | 50        | 88                    |
| 28SQBS048W120-□-□-□50-IP  | 18-75                | 48      | 1.17                     | 12          | 4.17        | 50        | 89                    |
| 28SQBS048W240-□-□-□50-IP  | 18-75                | 48      | 1.17                     | 24          | 2.08        | 50        | 89                    |
| 28SQBS048W280-□-□-□50-IP  | 18-75                | 48      | 1.17                     | 28          | 1.79        | 50        | 89                    |
| 28SQBS048W480-□-□-□50-IP  | 18-75                | 48      | 1.17                     | 48          | 1.04        | 50        | 89                    |
| 28SQBS048W120-□-□-□100-IP | 18-75                | 48      | 2.34                     | 12          | 8.4         | 100       | 89                    |
| 28SQBS048W240-□-□-□100-IP | 18-75                | 48      | 2.34                     | 24          | 4.17        | 100       | 89                    |
| 28SQBS048W280-□-□-□100-IP | 18-75                | 48      | 2.34                     | 28          | 3.57        | 100       | 89                    |
| 28SQBS048W480-□-□-□100-IP | 18-75                | 48      | 2.34                     | 48          | 2.08        | 100       | 89                    |
| 28SQBS110050-□-□-□50-IP   | 40-160               | 110     | 0.52                     | 5           | 10          | 50        | 88                    |
| 28SQBS110120-□-□-□50-IP   | 40-160               | 110     | 0.51                     | 12          | 4.17        | 50        | 89                    |
| 28SQBS110240-□-□-□50-IP   | 40-160               | 110     | 0.51                     | 24          | 2.08        | 50        | 89                    |
| 28SQBS110280-□-□-□50-IP   | 40-160               | 110     | 0.51                     | 28          | 1.79        | 50        | 89                    |
| 28SQBS110480-□-□-□50-IP   | 40-160               | 110     | 0.51                     | 48          | 1.04        | 50        | 89                    |
| 28SQBS110120-□-□-□100-IP  | 40-160               | 110     | 1.02                     | 12          | 8.4         | 100       | 89                    |
| 28SQBS110240-□-□-□100-IP  | 40-160               | 110     | 1.02                     | 24          | 4.17        | 100       | 89                    |
| 28SQBS110280-□-□-□100-IP  | 40-160               | 110     | 1.02                     | 28          | 3.57        | 100       | 89                    |
| 28SQBS110480-□-□-□100-IP  | 40-160               | 110     | 1.02                     | 48          | 2.08        | 100       | 89                    |
| 28SQBS300050-□-□-□50-IP   | 180-425              | 300     | 0.19                     | 5           | 10          | 50        | 88                    |
| 28SQBS300120-□-□-□50-IP   | 180-425              | 300     | 0.19                     | 12          | 4.17        | 50        | 89                    |
| 28SQBS300240-□-□-□50-IP   | 180-425              | 300     | 0.19                     | 24          | 2.08        | 50        | 89                    |
| 28SQBS300280-□-□-□50-IP   | 180-425              | 300     | 0.19                     | 28          | 1.79        | 50        | 89                    |
| 28SQBS300480-□-□-□50-IP   | 180-425              | 300     | 0.19                     | 48          | 1.04        | 50        | 89                    |
| 28SQBS300120-□-□-□100-IP  | 180-425              | 300     | 0.37                     | 12          | 8.4         | 100       | 89                    |
| 28SQBS300240-□-□-□100-IP  | 180-425              | 300     | 0.37                     | 24          | 4.17        | 100       | 89                    |
| 28SQBS300280-□-□-□100-IP  | 180-425              | 300     | 0.37                     | 28          | 3.57        | 100       | 89                    |
| 28SQBS300480-□-□-□100-IP  | 180-425              | 300     | 0.37                     | 48          | 2.08        | 100       | 89                    |

## Description

Ideal Power Supreme series - Quarter Brick - Second generation converter is composed of Isolated, board-mountable, fixed switching frequency DC-DC converters that use synchronous rectification to achieve extremely high power conversion efficiency. These DC-DC converter modules use advanced power processing, control, and packaging technologies to enhance the performance, flexibility, reliability, and cost effectiveness of mature power components. Each module is six-sided metal case enclosed to provide protection from the harsh environments seen in many industrial and transportation applications

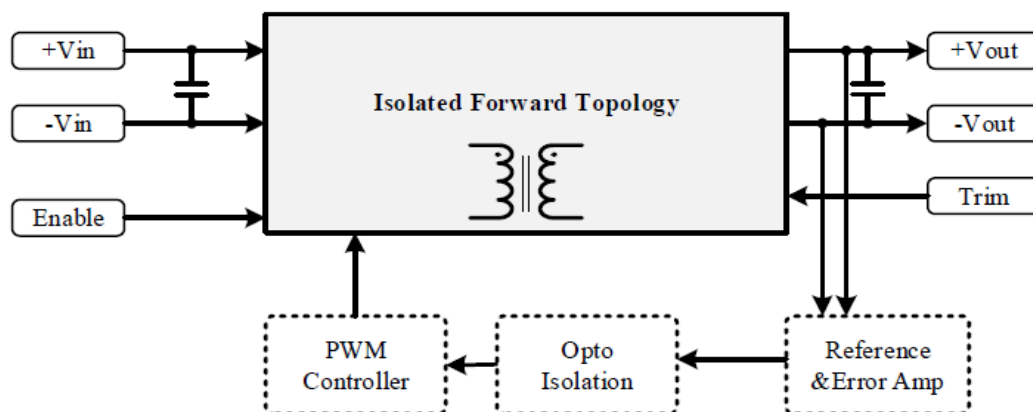

## Input Data

| Parameter                              | Notes and Conditions                                    |           | Min.                        | Typ. | Max. | Unit |
|----------------------------------------|---------------------------------------------------------|-----------|-----------------------------|------|------|------|
| Transient Input Voltage Ranges         | 28SQBS024W models (100ms Max)                           |           | --                          | --   | 50   | VDC  |
|                                        | 28SQBS048W models (100ms Max)                           |           |                             |      | 80   |      |
|                                        | 28SQBS110 models (100ms Max)                            |           |                             |      | 250  |      |
|                                        | 28SQBS300 models (100ms Max)                            |           |                             |      | 500  |      |
| Operating Input Voltage Ranges         | 28SQBS024W models                                       |           | 9                           | 24   | 36   | VDC  |
|                                        | 28SQBS048W models                                       |           | 18                          | 48   | 75   |      |
|                                        | 28SQBS110 models                                        |           | 40                          | 110  | 160  |      |
|                                        | 28SQBS300 models                                        |           | 180                         | 300  | 425  |      |
| Under-Voltage Lockout Start up Voltage | 28SQBS024W models                                       |           | --                          | --   | 9    | VDC  |
|                                        | 28SQBS048W models                                       |           |                             |      | 18   |      |
|                                        | 28SQBS110 models                                        |           |                             |      | 40   |      |
|                                        | 28SQBS300 models                                        |           |                             |      | 180  |      |
| Under-Voltage Lockout Shutdown Voltage | 28SQBS024W models                                       |           | --                          | 8    | --   | VDC  |
|                                        | 28SQBS048W models                                       |           |                             | 17   |      |      |
|                                        | 28SQBS110 models                                        |           |                             | 38   |      |      |
|                                        | 28SQBS300 models                                        |           |                             | 145  |      |      |
| Input filter                           | See model selection guide, Standby mode (OFF, UVLO) 8mA |           |                             |      |      |      |
| Enable Function Input                  | Positive logic                                          | ON<br>OFF | Open<br>Short or<br>0 ~ 1.2 |      |      |      |
|                                        | Negative logic                                          | ON<br>OFF | Short or<br>0 ~ 1.2<br>Open |      |      |      |

## General Specifications &amp; Environmental Data

| Parameter                                | Notes and Conditions                                   | Min.                                         | Typ. | Max. | Unit    |
|------------------------------------------|--------------------------------------------------------|----------------------------------------------|------|------|---------|
| Storage temperature range                | All models                                             | -60                                          | --   | 125  | C       |
| Switching frequency                      | VNOM                                                   | 180                                          | --   | 300  | kHz     |
| Operating case temperature               | All models                                             | -40                                          | --   | 100  | m       |
| Over temperature protection              | All models, Auto. Recovery                             | --                                           | 105  | --   | C       |
| Isolation Voltage<br>Input to Output     | All models, 1 Minute                                   | 2250                                         | --   | --   | VDC     |
| Isolation Resistance<br>Input to Output  | All models,<br>500VDC, At 70%RH                        | 100                                          | --   | --   | MΩ      |
| Isolation Capacitance<br>Input to Output | All models                                             | --                                           | 1500 | --   | pF      |
| Humidity (non-condensing)                | All models                                             | --                                           | --   | 95   | %       |
| Calculated MTBF                          | BellCore-TR-332@ 50°C G.B                              | --                                           | 1.2  | --   | M HR    |
| Thermal shock                            | Environmental Engineering<br>Experimental Tests        | MIL-STD-810F                                 |      |      |         |
| Vibration                                |                                                        | MIL-STD-810F                                 |      |      |         |
| Drop                                     |                                                        | MIL-STD-810F                                 |      |      |         |
| Weight                                   | Shape-B (Base Plate)<br>Shape-F (No Flange Base Plate) | 57(2.01)<br>54.5(1.92)                       |      |      | g (oz.) |
| Dimensions                               | Shape-B (Base Plate)<br>Shape-F (No Flange Base Plate) | 2.42" x 1.47" x 0.5" (61.36 x 37.3 x 12.7mm) |      |      |         |
| Case Material                            | Metal                                                  |                                              |      |      |         |
| Potting material                         | Silicone                                               |                                              |      |      |         |

## Output Data

| Parameter                  | Notes and Conditions                               | Min. | Typ. | Max.  | Unit    |
|----------------------------|----------------------------------------------------|------|------|-------|---------|
| Output Voltage Accuracy    | VNOM 50% Load                                      | --   | --   | ±1.5  | %       |
| Line Regulation            | Low Line to High Line                              | --   | --   | ±0.3  | %       |
| Load Regulation            | 10% to 100% Load                                   | --   | --   | ±0.5  | %       |
| Ripple & Noise Voltage     | Bandwidth 20MHz and with 1μF MLCC Output Capacitor | --   | 1.5  | --    | %Vpk-pk |
| Temperature Coefficient    | --                                                 | --   | --   | +0.04 | % /°C   |
| Transient Recovery Time    | 25% load step change                               | --   | 800  | --    | μSec    |
| Transient Peak Deviation   | ΔIo/Δt=2.5A/us                                     | --   | +2   | --    | %Vo     |
| Start-Up Time              | When use Enable Function                           | --   | 20   | --    | mSec.   |
| Trimming Output Protection | VNOM 10% Load                                      | --   | +10  | --    | %       |
| Output power protection    | VNOM 10% Load                                      | --   | 120  | --    | %       |
| Over Voltage Protection    | VNOM                                               | --   | 120  | --    | %       |

## Standards Compliance


| Parameter                | Standard    | Test conditions                                | Performance criteria |
|--------------------------|-------------|------------------------------------------------|----------------------|
| Environmental Compliance | Reach; RoHS | --                                             | Pass                 |
| EMI                      | EN55022     | --                                             | Class A / Class B    |
| ESD                      | EN61000-4-2 | ±4 kV Air Discharge<br>±4 kV Contact Discharge | Crit. A              |
| Radiated Immunity        | EN61000-4-3 | Level 2, 3 V/m                                 | Crit. A              |
| Fast Transient           | EN61000-4-4 | ±2 kV Applied                                  | Crit. A              |
| Surge                    | EN61000-4-5 | ±2 kV Applied                                  | Crit. A              |
| Conducted Immunity       | EN61000-4-6 | Level 2, 3 V rms                               | Crit. A              |

**It is recommended to protect the input by fuses or other protection devices.**

Modules could meet EN55032 Class A and Class B standard with external components.

The information and specifications contained in this data sheet are believed to be correct at time of publication. All specifications are subject to change without notice. No rights under any patent accompany the sale of any such products or information contained herein.

## Conducted EMI

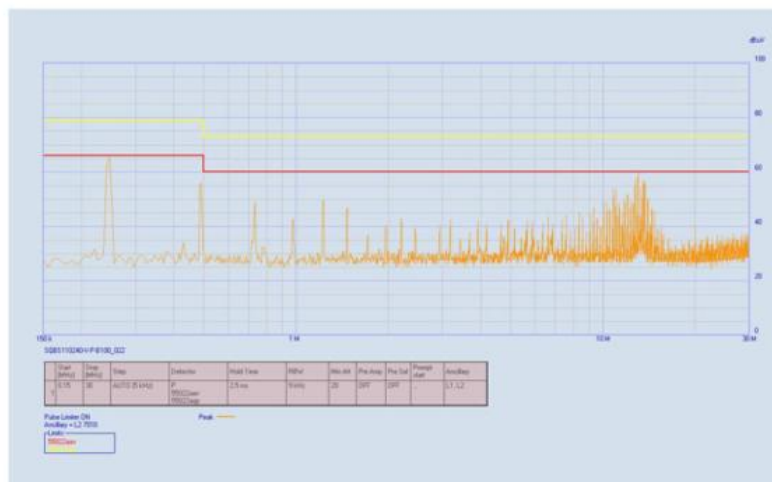

## Page 6 of 8



## Characteristic curves

Testing conditions are at typical input,  $T_a = +25^\circ\text{C}$ , full load (horizontal mount) Unless otherwise indicated

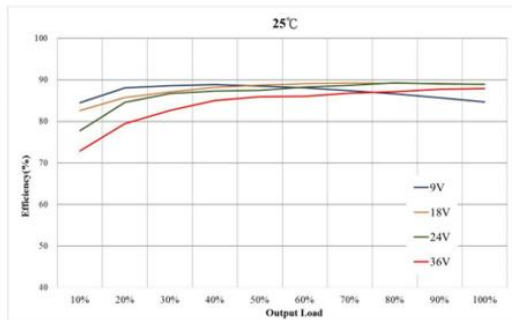


Figure 1: Efficiency at Minimum, Nominal and Maximum Input Voltages VS. Output Load.

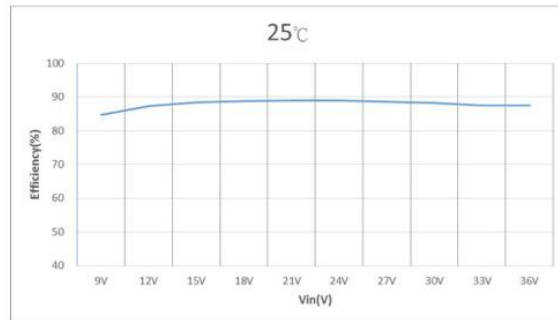


Figure 2: Efficiency VS. Input Voltages at 100% rated power

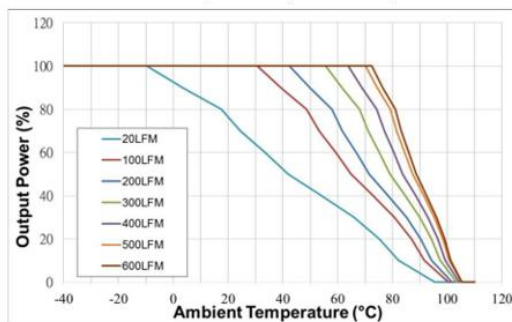


Figure 3: Ambient Temperature VS. Output Power Derating Curves (Note: 20LFM = Free Air)

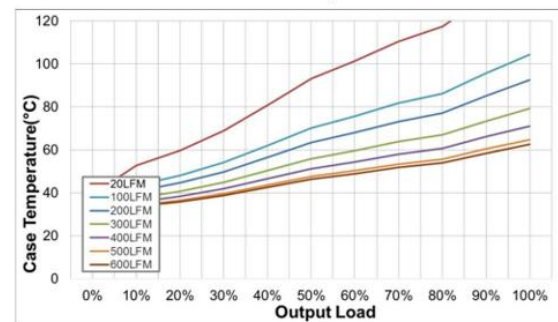


Figure 4: Case Temperature VS. Output rated Power (Note: 20LFM = Free Air)

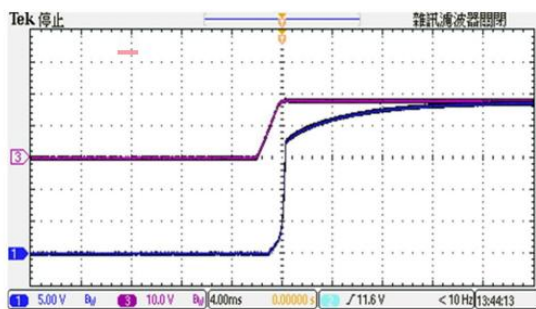


Figure 5: CH1 = Vout, CH3 = Nominal Input Typical Start-up waveform at Full load.

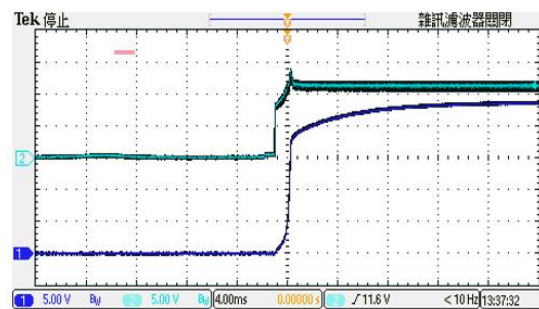


Figure 6: CH1 = Vout, CH3 = Enable Pin Typical Start-up waveform. Input voltage pre-applied

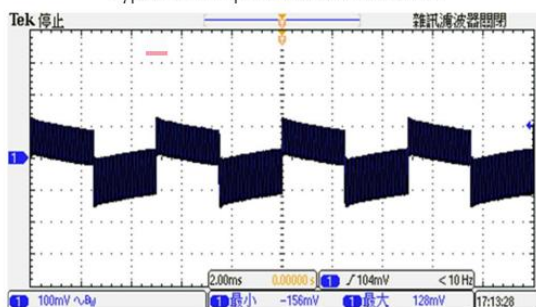


Figure 7: Transient Response at Output step load ( $V_{in}$ : Typical, 50~75% of output current;  $\Delta I_o / \Delta t = 1\text{A}/\mu\text{s}$ )

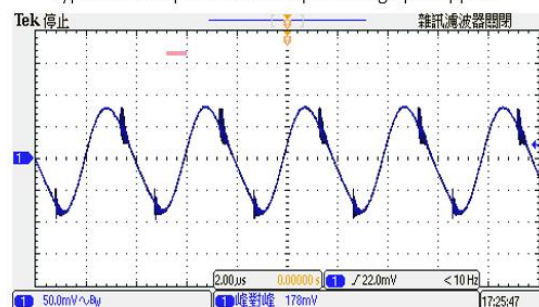


Figure 8: Output Voltage Ripple & Noise at full load. ( $V_{in}$ : Typical, With Output Capacitor to add 1uF MLCC)

## Trimming Output Voltage - For Single Output Models

Only the single output converters have a trim function. That allows users to adjust the output voltage from +10% to -10%, please refer to the trim table that follow for details. Adjustments to the output voltage can be used with a simple fixed resistor as shown in Figures 1 and 2. A single fixed resistor can increase or decrease the output voltage depending on its connection.

### Note:

※ Trim adjustments higher than the specified range can have an adverse effect on the converter's performance and are not recommended.

※ If the trim function is not used, leave the trim pin open.

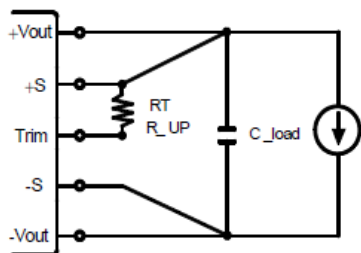


Figure 1. Trim Connections To increase Output Voltages Using Fixed Resistors

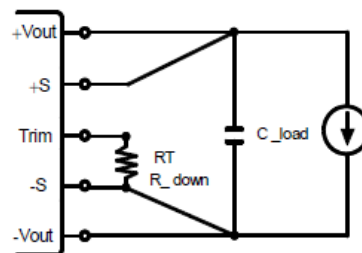


Figure 2. Trim Connections To Decrease Output Voltages Using Fixed Resistors

Trim up resistor value(KΩ)

| Vout | 1%   | 2%  | 3%  | 4%  | 5%  | 6% | 7% | 8%  | 9%  | 10% |
|------|------|-----|-----|-----|-----|----|----|-----|-----|-----|
| 5    | 109  | 50  | 30  | 20  | 14  | 10 | 7  | 5   | 3.3 | 2   |
| 12   | 258  | 115 | 67  | 44  | 29  | 20 | 13 | 7.8 | 3.8 | 0.6 |
| 24   | 514  | 232 | 137 | 90  | 62  | 43 | 30 | 20  | 12  | 5.5 |
| 28   | 602  | 271 | 161 | 105 | 72  | 50 | 34 | 22  | 13  | 5.9 |
| 48   | 1039 | 464 | 273 | 177 | 120 | 81 | 54 | 34  | 18  | 5   |

Trim down resistor value(KΩ)

| Vout | -1%  | -2% | -3% | -4% | -5% | -6% | -7% | -8% | -9% | -10% |
|------|------|-----|-----|-----|-----|-----|-----|-----|-----|------|
| 5    | 137  | 62  | 37  | 25  | 17  | 12  | 9   | 6   | 4   | 2.2  |
| 12   | 358  | 162 | 96  | 63  | 44  | 31  | 21  | 14  | 8.9 | 4.5  |
| 24   | 769  | 352 | 213 | 143 | 102 | 74  | 54  | 39  | 28  | 18   |
| 28   | 860  | 392 | 236 | 158 | 111 | 80  | 57  | 41  | 28  | 17   |
| 48   | 1413 | 638 | 380 | 251 | 173 | 121 | 85  | 57  | 35  | 18   |

### Enable Control Function

The primary-side, Enable Control function can be specified to operate with either positive or negative polarity. Positive-polarity devices are enabled when the enable pin is left open or is pulled high. See "Enable Function Input. Positive-polarity devices are disabled when the enable pin is pulled low (under +1.0V with respect to -input). Negative-polarity devices are off when the enable pin is high/open and on when the enable pin is pulled low. See Figure 3.

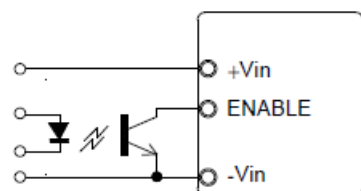


Figure 3. Driving the Enable Control pin

### Output Ripple Noise

The two copper strips simulate real-world PCB impedances between the converter and its load. Scope measurements should be made using BNC connectors or the probe ground should be less than 1/2 inch and soldered directly to the fixture. All external capacitors should have appropriate voltage ratings and be located as close to the converter as possible. Temperature variations for all relevant parameters should be taken into consideration. The most effective combination of external I/O capacitors will be a function of line voltage and source impedance, as well as load and layout conditions. See Figure 4

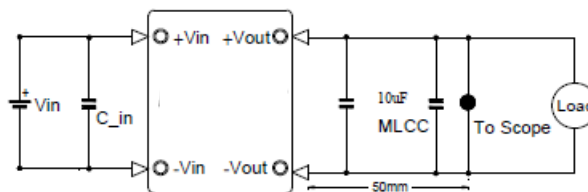


Figure 4. Measuring Output Ripple/Noise(20MHz bandwidth)