AC – AC

Features

- 230-240V AC 50Hz Input
- Direct UK Fixed Plugtop Adapters
- Approved to UKCA, CE, RoHS & REACH
- BS EN 61558-2-6 & BS EN 61558-1 Safety Approved
- Meets a Level VI & (EU) 2019/1782
- Output Voltage 3.5 – 24Vac
- Output Current 0.25-1.71A
- Weight 250g

Ideal Power's 77DB-06-xy 6VA AC/AC External Adapter UK Plugtop Power Supply (PSU)Series are certified to UKCA, CE, RoHS, REACH & BS EN 61558-2-6 & BS EN 61558-1 Standards and comply with (EU) 2019/1782, Level VI Efficiency Regulations. These are primarily used in ITE, Audio & Video Industries and customised solutions are available upon request.

Models

Model Number	Output Voltage V AC	Output Current Amp	Output Power VA
77DB-06-3.5	3.5	1.71	6
77DB-06-06	6	1	6
77DB-06-7.5	7.5	0.8	6
77DB-06-09	9	0.666	6
77DB-06-12	12	0.5	6
77DB-06-15	15	0.4	6
77DB-06-18	18	0.333	6
77DB-06-20	20	0.3	6
77DB-06-22	22	0.272	6
77DB-06-24	24	0.25	6

Input Data

	Min	Typical	Max	Units
Input Voltage	230	--	240	V AC
Input Frequency	--	50	--	Hz

Ideal Power Limited
14 Larks Way, Tree Beech Enterprise Park, Gunn, Barnstaple, Devon, England, EX32 7NZ.
www.idealpower.co.uk | salessupport@idealpower.o.uk | +44 (0) 1733 309865

AC – AC

General Specifications

	Min	Typical	Max	Units	Notes
Operating Temperature	-10	--	+40	ºC	
Storage Temperature	-20	--	+70	ºC	
Relative Temperature					40ºC ±2ºC
Relative Humidity					90% RH
Safety Standard					BS EN 61558-2-6 & BS EN 61558-1

Other Information

Weight	265g
Dimensions	64.0 x 52.0 x 48.0 mm
Output Cable	1.8m Length + 5.5 x 2.1 x 10mm Plug

Mechanical Drawing

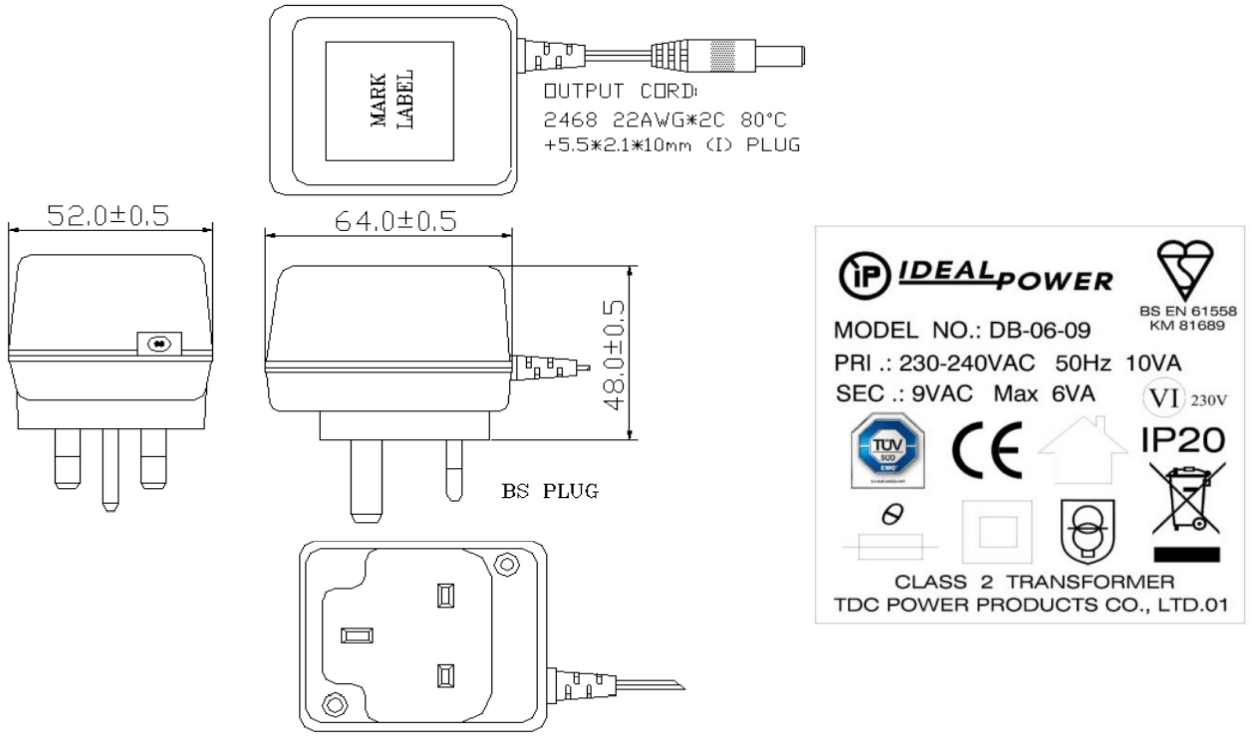
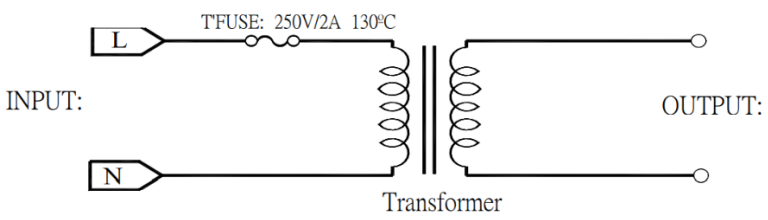
Electrical Circuit